

# FloraStone®

decorative stone carving

Comes in multiple floral design and sizes, the new and innovative FloraStone® deliver a touch of elegant and style to your home.

Apart from the high quality signature of all CraftStone®'s products, you will find FloraStone® easy to install and virtually maintenance free for both indoor and outdoor application.

Add a timeless appeal and master piece of art to your home and design with FloraStone® today!









A15151



A30301 L30 x W30 x 4cm(thk)



A30302 L30 x W30 x 4cm(thk)



A30303 L30 x W30 x 4cm(thk)



A20202

L20 x W20 x 2.5cm(thk)

L30 x W30 x 4cm(thk)

A30304

A30305 L30 x W30 x 4cm(thk)



A30306 L30 x W30 x 3.5cm(thk)





# A20201



L20 x W20 x 2.5cm(thk)







A303010

L30 x W30 x 4cm(thk)



A30308 L30 x W30 x 3.5cm(thk)



A303011

L30 x W30 x 4cm(thk)



A30309

L30 x W30 x 4cm(thk)



A303012 L30 x W30 x 4cm(thk)













A120601

L120 x W60 x 6.5cm(thk)



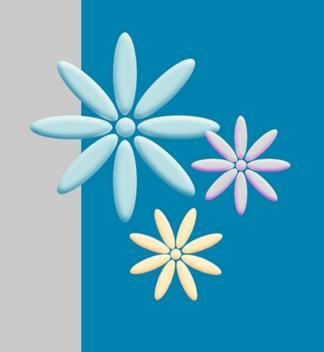

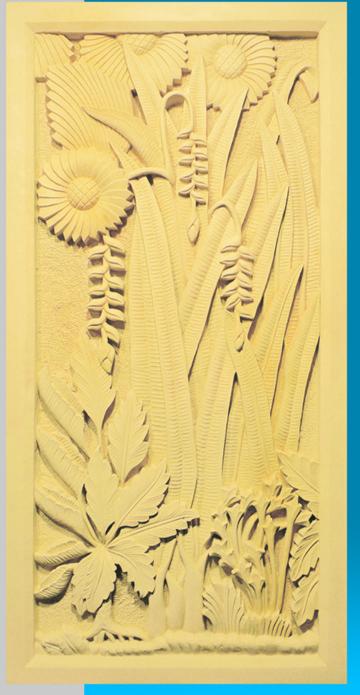

A120602

L120 x W60 x 6.5cm(thk)



A41413 L41 x W41 x 4.5cm(thk)




**A41411** L41 x W41 x 3.5cm(thk)



A41412 L41 x W41 x 3.5cm(thk)



A80401 L80 x W40 x 4cm(thk)

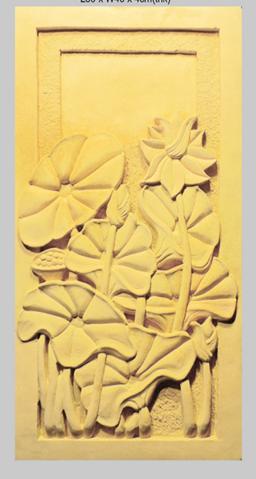

A60601 L60 x W60 x 4.5cm(thk)



A61612 L61 x W61 x 4cm(thk)






L30 x W30 x 4cm(thk)



E30302 L30 x W30 x 4cm(thk)




**E30303** 

L30 x W30 x 4cm(thk)



E30304





All FloraStone® products are wrap with specially designed cardboards to protect the stone against damages while the polyester straps make handling easy and secure packaging.



# Installation Method

FloraStone® can be installed onto any structually sound and properly prepared surface.

For masonary walls, ensure that the wall is free from any baint grease, oil or dirt. Apply mortar onto the entire back side of FloraStone® and remove excess mortar over flowing to the side Press FloraStone® firmly on the wall and use nails for temporary supports before the mortar harden. Wipe off excess mortal around the edges.

For <u>wooden surface</u>, ensure that the surface is free from oil, dir or paint. Secure metal mesh (cut to size of FloraStone®) on the surface with galvanised nails or staples. Apply adhesive construction glues or adhesive mortar onto the entire back side of FloraStone® and press firmly against the metal mesh to ensure the glue/mortar has embedded the metal mesh and sticking onto the wood surface. Remove excess glue/mortar around the edges



All FloraStone® products are marked at the side with individual codes for easy identification!

# **Technical Specification**

#### 25-Year Limited Warranty

FloraStone® products carry a 25-year limted warranty when used on structures that conform to local building codes and installed according to the maunfacturer's instruction. Warranty is limited to replacement of defective materials only. Damages resulting from building settlement, wall movement, force contact, contact with chemicals or paint, discoloration due to airborne contamination staining or oxidation, will not be covered under the warranty

Warranty is non-transferable and is only limited to the original pur chaser.

#### Water Repellent

FloraStone® products feature the addition of water-based water repellent that greatly enhances the stone's performance in humid climate. Water repellent is mixed with the composite material during manufacturing, thus providing a more lasting effect then spray, brush or paint method.

## Non-Combustible

FloraStone® products show zero flame spread and zero smoke development

## **General Properties**

Material Composition: Portland Cement, Light-Weight Aggregates and Iron Oxide Pigments.

## **Physical Properties**

Water Absorption: <13%

Open Porosity\*: <35%

Compressive Strength\*: >12.0N/mm²

Flexural Strength\*; >5.0N/mm<sup>2</sup>

\*Test reference to NBN EN 1926 (1999), NBN EN 12372 (1999)

